

PUBLIC VIEW MONITOR LARGE FORMAT

FEATURES


- 5MP WDR Camera with Varifocal Lens for Superior Image Quality
- Remote Zoom and Focus Capabilities for Simple Setup
- Power-over-Ethernet (PoE) Capable for Easy Installation
- Attention Grabbing Features Deliver High-Deterrent Value
- UL Listed

SPECIAL FEATURES

- Remote Varifocal Setting and Auto-Focus
- Face Blocking
- Video Motion Detection
- White LEDs (On, Off, Flashing, Motion On, Motion Flash)



www.wrensolutions.com

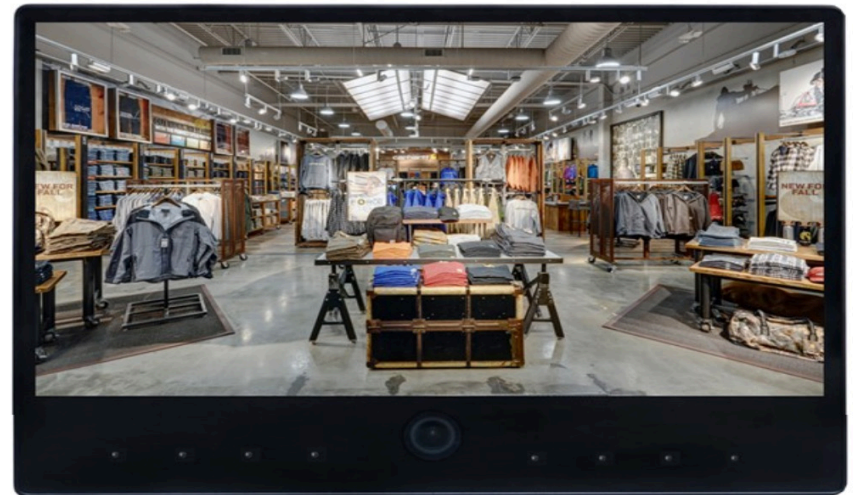

PRODUCT INFORMATION SHEET



www.wrensolutions.com

Model Number	PVM21-B-2094-B
DISPLAY	
Panel	21.5" LED Backlight
Resolution	1920 x 1080
Aspect Ratio	16:9
Brightness	250 NIT
Contrast Ratio	
Viewing Angle - W x H	
Response Time	18 ms
CABINET	
VESA Pattern	100 x 100, 200 x 100
Dimensions - W x H x D (in)	19.80 x 14.20 x 1.80
Weight	11.2 lbs (5.1 kg)
Construction	Black Plastic w/ Glass Front
Operating Temperature	32°F - 104°F (0°C - 40°C)
CONNECTIONS / POWER	
Input Voltage	48VDC POE or 24VDC
Power Consumption	35 Watts
Network	RJ45
HDMI	1 Input
USB	HDMI
Power	2.5mm Barrel Plug

ACCESSORIES

MMB0302	Articulating Wall Mount, VESA 75x200, Black
MMB0601	Ceiling Mount, Back-to-Back, 1.5" NPT, VESA 400x400 Black (w/ CM-XL-x Pole)
MMB0602	Ceiling Mount, Single, 1.5" NPT, VESA 400x400, Black (w/ CM-XL-x Pole)
MMB0603	Ceiling Mount, Single, 1.5" NPT, VESA 75-200, Black (w/ CM-XL-x Pole)
MMB0604	Ceiling Mount, Back-to-Back, 1.5" NPT, VESA 75-200, Black (w/ CM-XL-x Pole)
CM-XL-5-W	Telescoping Pole, 2-5.5' length, White (w/ MMB060x Ceiling Mount)
CM-XL-11-W	Telescoping Pole, 6-11' length, White (w/ MMB060x Ceiling Mount)
CM-XL2-21-W	Telescoping Pole, 8-21' length, White (w/ MMB060x Ceiling Mount)
DCSP-CMXL	Drop Ceiling Support Plate, use with a CM-XL-x Pole, White
CS-7	Unistrut, 7', Open Ceiling Framing Channel, White

CERTIFICATIONS

UL, CE, FCC Class B RoHS Compliant

CAMERA

Image Sensor	1/2.7" OmniVision 0S05A20
Resolution	5MP, 2688 x 1944
Dream Stream Settings	Maximum Frame Rate = 30 fps
Minimum Illumination	0.01 Lux/F1.2
S/N Ratio	39 dB
Lens	Varifocal 2.8-12mm, Auto zoom/focus
Shutter Speed	1/60—1/10,000 sec.
Video Format	H.264, H.265
Compatibility	Vivotek, ONVIF Profile S

Model Number	PVM27-B-2094-B
DISPLAY	
Panel	27" LED Backlight
Resolution	1920 x 1080
Aspect Ratio	16:9
Brightness	300 NIT
Contrast Ratio	3000:1
Viewing Angle - W x H	178° x 178°
Response Time	12 ms
CABINET	
VESA Pattern	100 x 100, 200 x 100
Dimensions - W x H x D (in)	25.08 x 17.65 x 1.90
Weight	18.2 lbs (8.3 kg)
Construction	Black Plastic w/ Glass Front
Operating Temperature	32°F - 104°F (0°C - 40°C)
CONNECTIONS / POWER	
Input Voltage	48VDC POE or 24VDC
Power Consumption	45 Watts
Network	RJ45
HDMI	1 Input
USB	HDMI
Power	2.5mm Barrel Plug

Model Number	PVM32-B-2094-B
DISPLAY	
Panel	31.5" LED Backlight
Resolution	1920 x 1080
Aspect Ratio	16:9
Brightness	300 NIT
Contrast Ratio	
Viewing Angle - W x H	
Response Time	8 ms
CABINET	
VESA Pattern	200 x 200
Dimensions - W x H x D (in)	29.68 x 20.89 x 2.25
Weight	27.7 lbs (12.3 kg)
Construction	Black Plastic w/ Glass Front
Operating Temperature	32°F - 104°F (0°C - 40°C)
CONNECTIONS / POWER	
Input Voltage	48VDC POE or 24VDC
Power Consumption	65 Watts
Network	RJ45
HDMI	1 Input
USB	HDMI
Power	2.5mm Barrel Plug



124 Wren Parkway, Jefferson City, MO 65109 USA
 (800) 881-2249 • www.WrenSolutions.com

Wren,® the Wren logo, and Hyperion® are trademarks of Wren. The trademarks that are followed by ® are registered trademarks in the U.S. All other trademarks and/or registered trademarks mentioned herein are properties of their respective owners and are for reference purposes only. The use of such third party trademarks does not indicate any affiliation with or sponsorship of or by Wren Solutions. Copyright © 2021 Wren Solutions. All rights reserved.