

PRODUCT INFORMATION SHEET

# HYPERION™

## DIGITAL I/O PORT EXPANDER

This wireless device provides a seamless method to connect 3rd party security devices to Hyperion to be used in system response as part of the Hyperion perimeter security solution.

### FEATURES

- 4 Digital Input or 4 Digital Output Connections
- Connected Devices Can Initiate Automated Response or Act as Part of the Automated Response
- Long Range Wireless Technology for Reliable Performance
- Managed by the Hyperion Application Software



[www.wrensolutions.com](http://www.wrensolutions.com)

### MODEL

HYP-DI4R-B Digital Input Device, 4 Inputs, Wireless

HYP-DO4R-B Digital Output Device, 4 Outputs, Wireless



## PRODUCT INFORMATION SHEET

# DIGITAL I/O PORT EXPANDER

### CONSTRUCTION

- Housing: Polycarbonate
- Finish: Light Gray
- Weight: 0.50 lbs

### HYPERION RADIO

- Frequency: 902-928 MHz
- Modulation: Frequency Shift Keying (FSK)
- Sensitivity: -120 dBm

### DEVICE OPTIONS

- Model: HYP-DI4R-B - Inputs x4 (Dry Contact Only)
- Model: HYP-DO4R-B - Outputs x4 (Dry Contact Only)

### ELECTRICAL

- Operating Voltage: DC 24V
- Power: 1.0A Max. (@ DC 24V)



[www.wrensolutions.com](http://www.wrensolutions.com)


### ENVIRONMENTAL

- Environment: Indoor
- Operating Temperatures: -20°F to 130°F (-30°C to 55°C)

### CERTIFICATIONS

- FCC Part 15
- IC Class A/B ICES-003

### DIMENSIONS

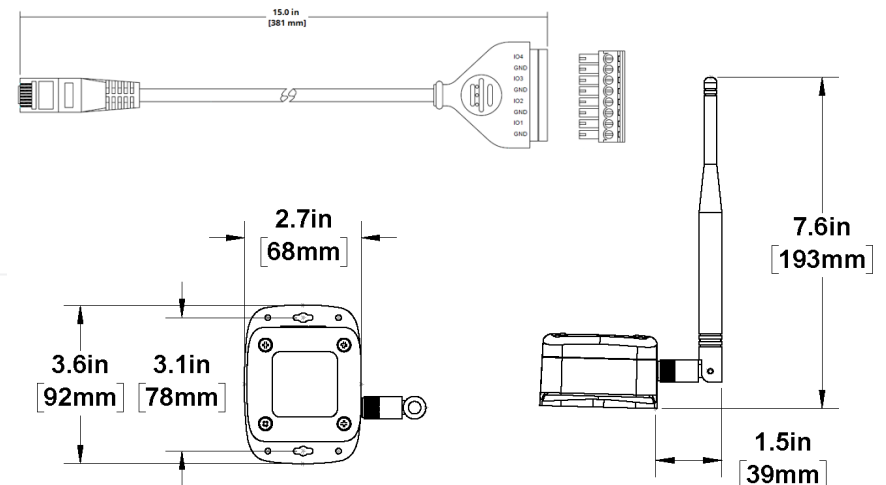

124 Wren Parkway, Jefferson City, MO 65109 USA  
(800) 881-2249 • [www.WrenSolutions.com](http://www.WrenSolutions.com)

Wren,® the Wren logo, and Hyperion® are trademarks of Wren. The trademarks that are followed by ® are registered trademarks in the U.S. All other trademarks and/or registered trademarks mentioned herein are properties of their respective owners and are for reference purposes only. The use of such third party trademarks does not indicate any affiliation with or sponsorship of or by Wren Solutions. Copyright © 2021 Wren Solutions. All rights reserved.